


DRYER-D


บริษัท เอ็มทีเอส ซีเอ็นซี ซิสเต็ม จำกัด 48/300 ซ.หทัยราษฎร์ 37 ถ.หทัยราษฎร์ แขวง สามวาตะวันตก เขตคลองสามวา กรุงเทพฯ 10510

โทร: 02-9067988 MB: 092-2753497 Line ID : dryer-d , Line@ : @dryer-d E-mail: dryer.dservice@gmail.com www.dryer-d.com

Installation characteristics within the ceiling

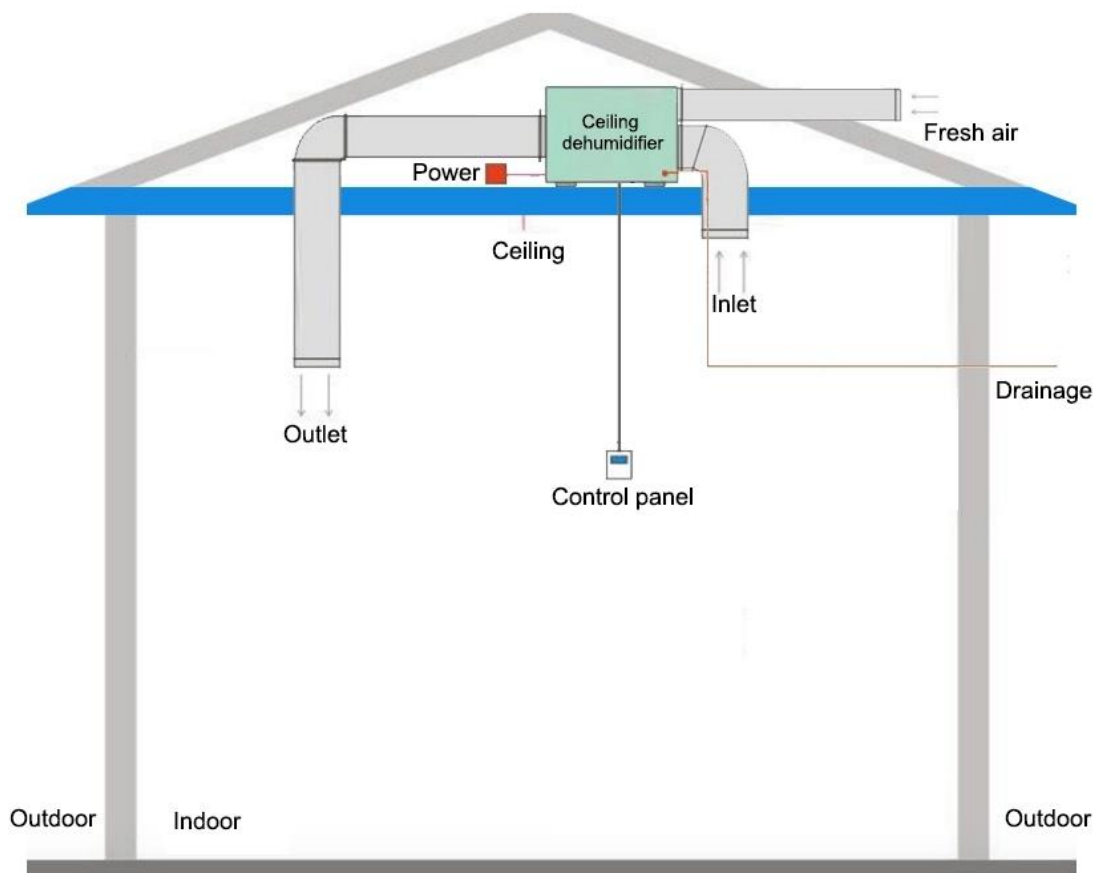

Installation characteristics in the ceiling in the room

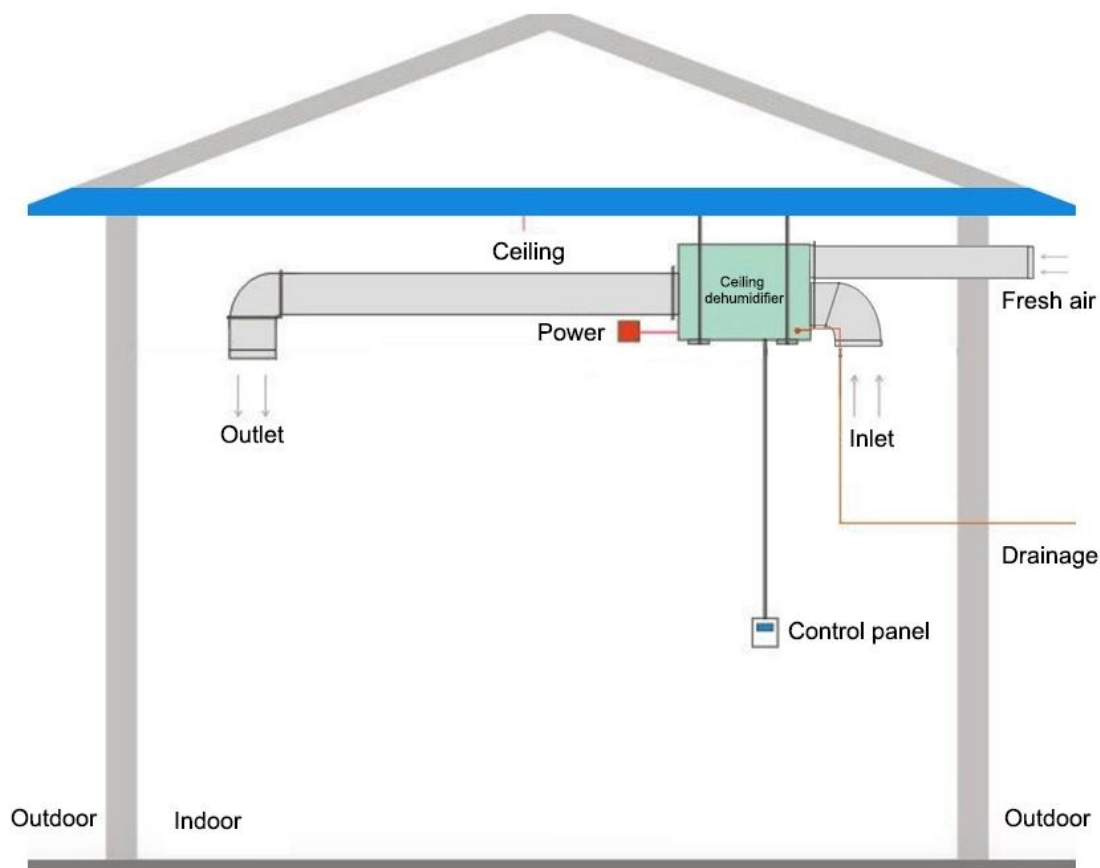

DRYER-D

บริษัท เอ็มทีเอส ซีเอ็นซี ซิสเต็ม จำกัด 48/300 ซ.หทัยราษฎร์ 37 ถ.หทัยราษฎร์ แขวง สามวาตะวันตก เขตคลองสามวา กรุงเทพฯ 10510

โทร: 02-9067988 MB: 092-2753497 Line ID : dryer-d , Line@ : @dryer-d E-mail: dryer.dservice@gmail.com www.dryer-d.com

Specification Ceiling Silm ERV Dehumidifier Model: EDS-30D (WIFI)



Model	EDS-30D (WIFI)
Voltage/Cycle	220V / 50Hz
Power Input (W)	360 W
Dehumidifying Capacity	30 L/Day (30°C, 80%RH)
Humidity Set	31% - 90%RH
Humidity level can be set	+/- 1%RH
Working mode humidity set	Heat Exchange efficiency: 73-78%
Coverage area	30 – 70 sq.m (High 3 m)
Refrigerant	R134a
Fresh Air Flow	600 m ³ /h , 353 cfm
Air Flow	260 m ³ /h , 153 cfm
Indoor & Outdoor Air Inlet	100 mm / 3.9"
Indoor & Outdoor Air Outlet	150 mm / 5.9"
Fan Speed	Centrifugal fan 2 speed (Low, High)
Static pressure	334 Pa excluding air filter
Three – layer filter	1.Cotton Filter 2.Carbon filter 3.HEPA filter & UV Lamp
Working temperature range	5°C- 38°C
Drainage Method	Built-in water Pump Drain 16 mm
Noise	≤40 dB at a distance of 1 m.
Choose to use 3 modes	1.ERV 2. Dehumidify 3. Dehumidify & ERV
Safety / Features	3 min delay protection, Show Failure Code, Show Room Temp, Show PM2.5, Auto Restart, Timer 1-24 Hr Automatic Defrost, Wifi with Smart Life &Tuya Smart application
Unit Dimension (mm.)	1085*560*255 (±5).
N/W	43 Kg (±2)